

(60MM THICK PUF WALL)

NOTE : ALL DIMENSION IN MM

D : WOODEN FLUSH DOOR WITH WOODEN GAUGED SHUTTER WITH WIRE MESH (1.00M X 2.10M)

W : GLAZED ALUMINIUM WINDOW WITH FLY PROOFING (1.200 X 1.200M)





CO : COOLER OPENING (0.65 X 0.65M)

C : MAIN COLUMN

C2 : VERANDHA COLUMN


C2 : EXTRA/DOOR COLUMN

**LEGEND**

- Ceiling fan - 
- CFL - 
- 15 Amp socket - 
- 5 Amp socket - 

**LAY OUT PLAN OF SHELTER**

GI PLAIN OUTER SHEET WITH 240 MPa STEEL AND 180 GSM Alu-ZN COATING

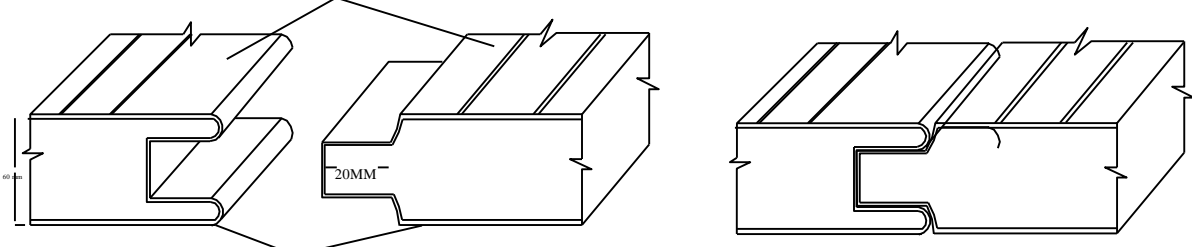

GI PLAIN INNER SHEET WITH 300 MPa STEEL AND 150 GSM Alu-ZN COATING

**BEFORE JOINING**

**AFTER JOINING**

**TYPICAL DETAILS OF PUF JOINT**

PANEL SHALL HAVE TONGUE AND GROOVE JOINT WITH CONCEALED FIXING SYSTEM AND SHALL BE FIXED TO THE GIRT WITH HOT DIPPED GALVANISED SELF DRILLING FASTENERS WITH WASHERS AND NECESSARY OVERLAP AS PER MANUFACTUER SPECIFICATION

<b>DRG NO -</b>	1/1